




Accessories



Extender Block



V-Pad

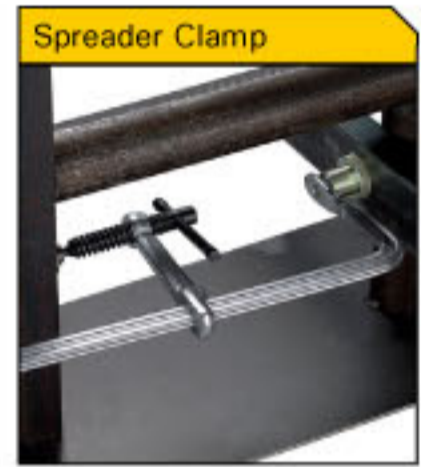

Part No.	Capacity	Throat Depth	Rail Sizes	Threaded Hole	Clamp Pressure	J-Length	Pad	Weight
UM65	6-1/2" (165 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	5.5 lbs (2.5 Kg)
UM85	8-1/2" (215 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	6.5 lbs (2.7 Kg)
UM85P	8-1/2" (215 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	STD	5.5 lbs (2.5 Kg)
UM105	10-1/2" (270 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	6.5 lbs (3.0 Kg)
UM105P	10-1/2" (270 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	STD	6.5 lbs (3.0 Kg)
UM125	12-1/2" (320 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	6.5 lbs (3.0 Kg)
UM125P	12-1/2" (320 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	STD	6.5 lbs (3.0 Kg)
UM125J	12-1/2" (320 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	4" (100 mm)	HD	8.5 lbs (3.6 Kg)
UM165	16-1/2" (420 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	7.5 lbs (3.4 Kg)
UM205	20-1/2" (520 mm)	5-1/2" (140 mm)	1-3/16 x 9/16 (30 x 14 mm)	3/8-16 (M10)	2400 lbs (1100 Kg)	---	HD	8.5 lbs (3.9 Kg)